

3 PH PADMOUNT TYPE ONAN

3750 KVA 65 °C SERIAL NO.: _____



_____ %IZ @ 85 °C 3069 L OIL




NON PCB 60 HZ 9318 KG TOTAL MASS

27600 H.V. 150 KV BIL

600Y/347 L.V.

HV-AL

LV-AL

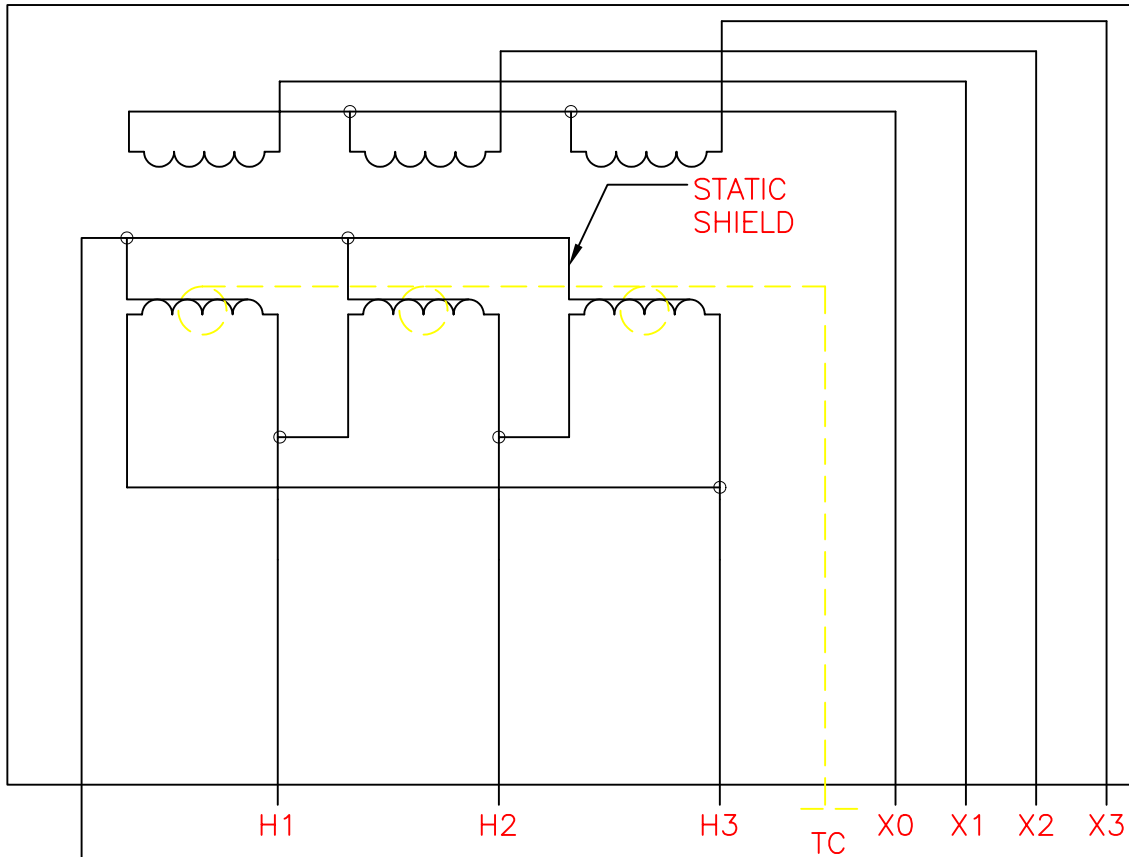

STATIC SHIELD BUSHING

TAPS: FCAN
FCBN



HV	POS.	A/1	B/2	C/3	D/4	E/5
TAPS	%	105.0	102.5	100.0	97.5	95.0

SPEC. # C227.2/C227.4

REV # 0

Xref g:/acadmfrn/DATE/2004wg

115A885A01